

# Zeta Slim Profile

Architectural Linear






The LED luminaire market has become more competitive, we see many similar products, that only focus on price. We designed a lighting product that achieves innovation, versatility and affordability together, and it was named after the Greek letter Zeta; the shape of the letter Z resembles lightning.




# Exquisite


Zeta series is a unique linear series that brings any space to the center stage. These timeless, streamlined forms blend well with contemporary decors and modern workplaces. These linear luminaries simply provide wide, powerful lighting to any atmosphere.

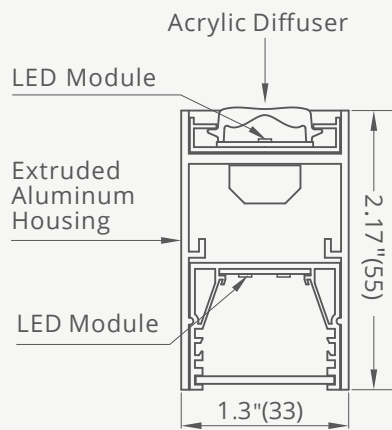


## Standard lengths for any applications

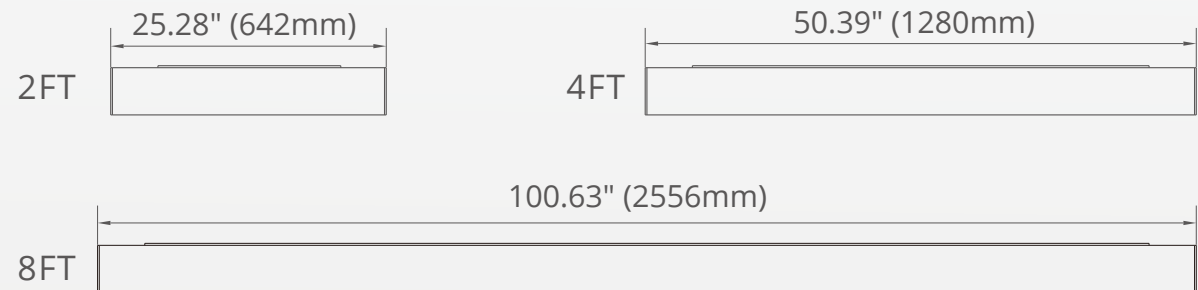







100°  
Diffuser



60°  
Louver



110°  
Convex




48°  
Micro Reflector

## Visual Comfort

Zeta offers a selection of professional lenses such as diffuser, louver, micro reflector and convex; each of these lenses challenges the critical glare rating and elevate our entire architectural product line to a higher standard. These precise distributions can better decorate the space without any concern.

# Powerful

When suspended, the Zeta Series can provide smooth direct or indirect lighting distribution , allowing for wider spacing between fixtures and better ceiling light uniformity.

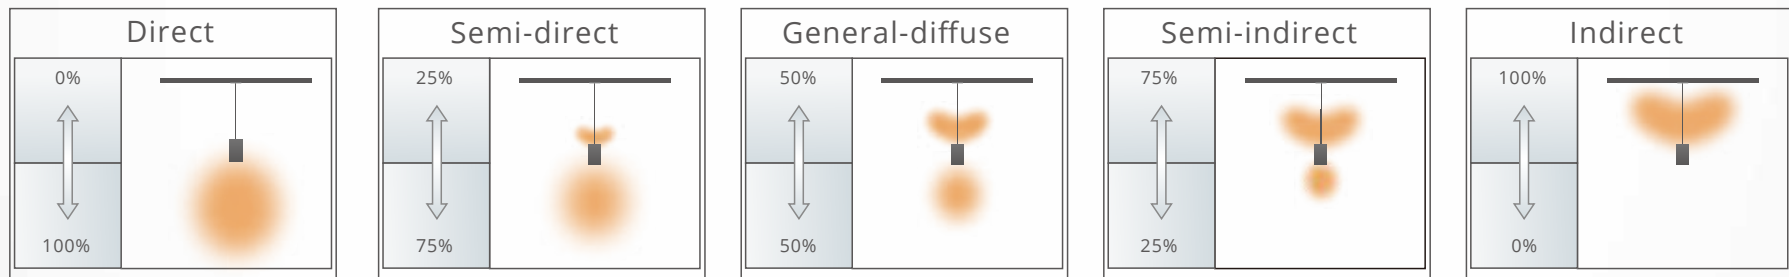

## Ext.Driver Only\*

- "7 in 1" 7 embedded lighting distributions adjusting by dip switch
- Smoothly control direct/indirect lighting distributions by a remote 0-10v dimmer.









## Versatile


Unleash lighting design flexibility with Zeta with different shapes and patterns, it adds fun factor into each room. These creations will let you suggest rhythm, communicate meaning and showcase element of life.




'4' Pattern



'T' Pattern



'L' Pattern




'I' Pattern






# Open Area

Application Data

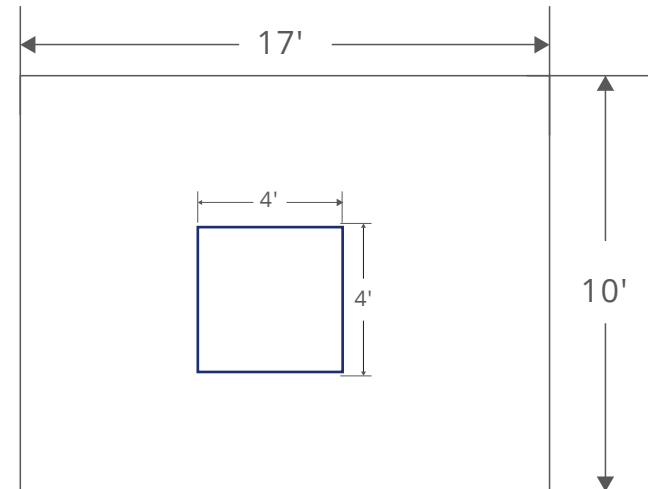

	<b>ZE4-ID40R</b>
Average Illumination	32 fc
Consumption(w/ft <sup>2</sup> )	0.39w/ft <sup>2</sup>

- ※ Product shown above  
-4000K  
-Internal driver  
-Diffuser

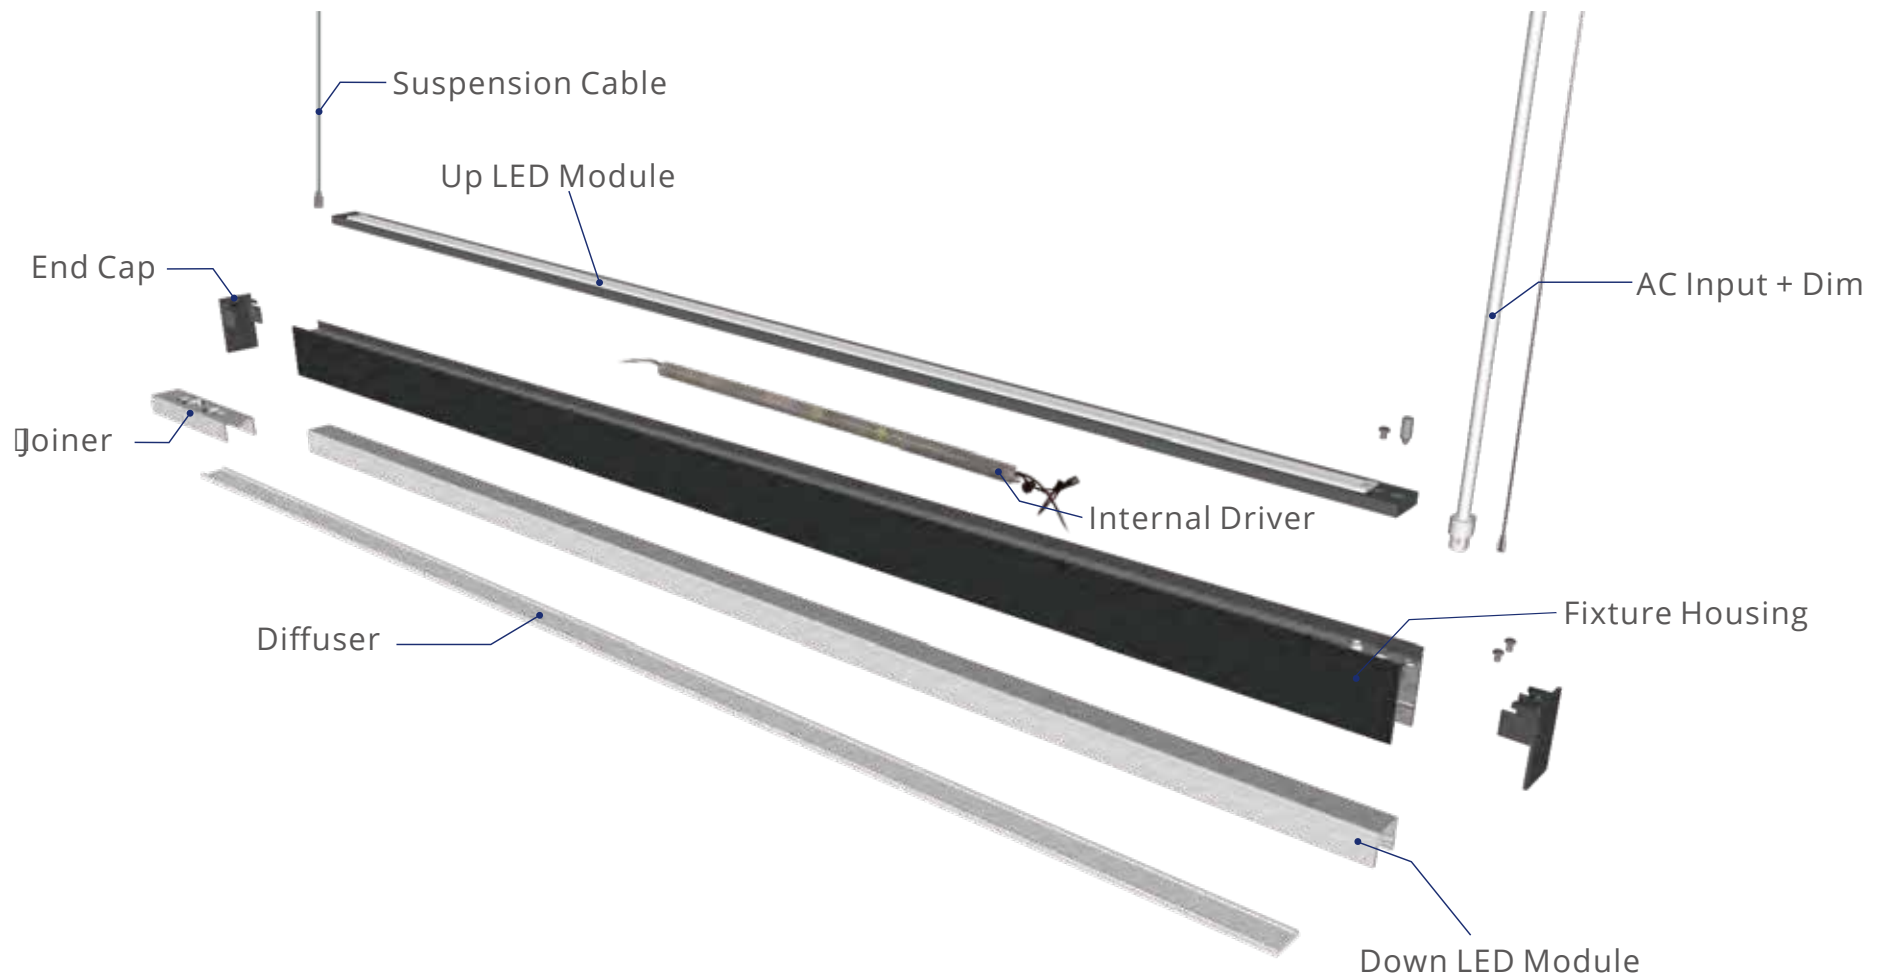

## Distinctive

Built on the core of its modern, practical design philosophy, the Zeta Series allows easy access to critical components to simplify installation or in the event that repair or replacement becomes necessary.




### External Driver Option

- ✓ Supports 347VAC
- ✓ Emergency driver or Sensor available

# QuickShip

\*Base on availability on color temperature

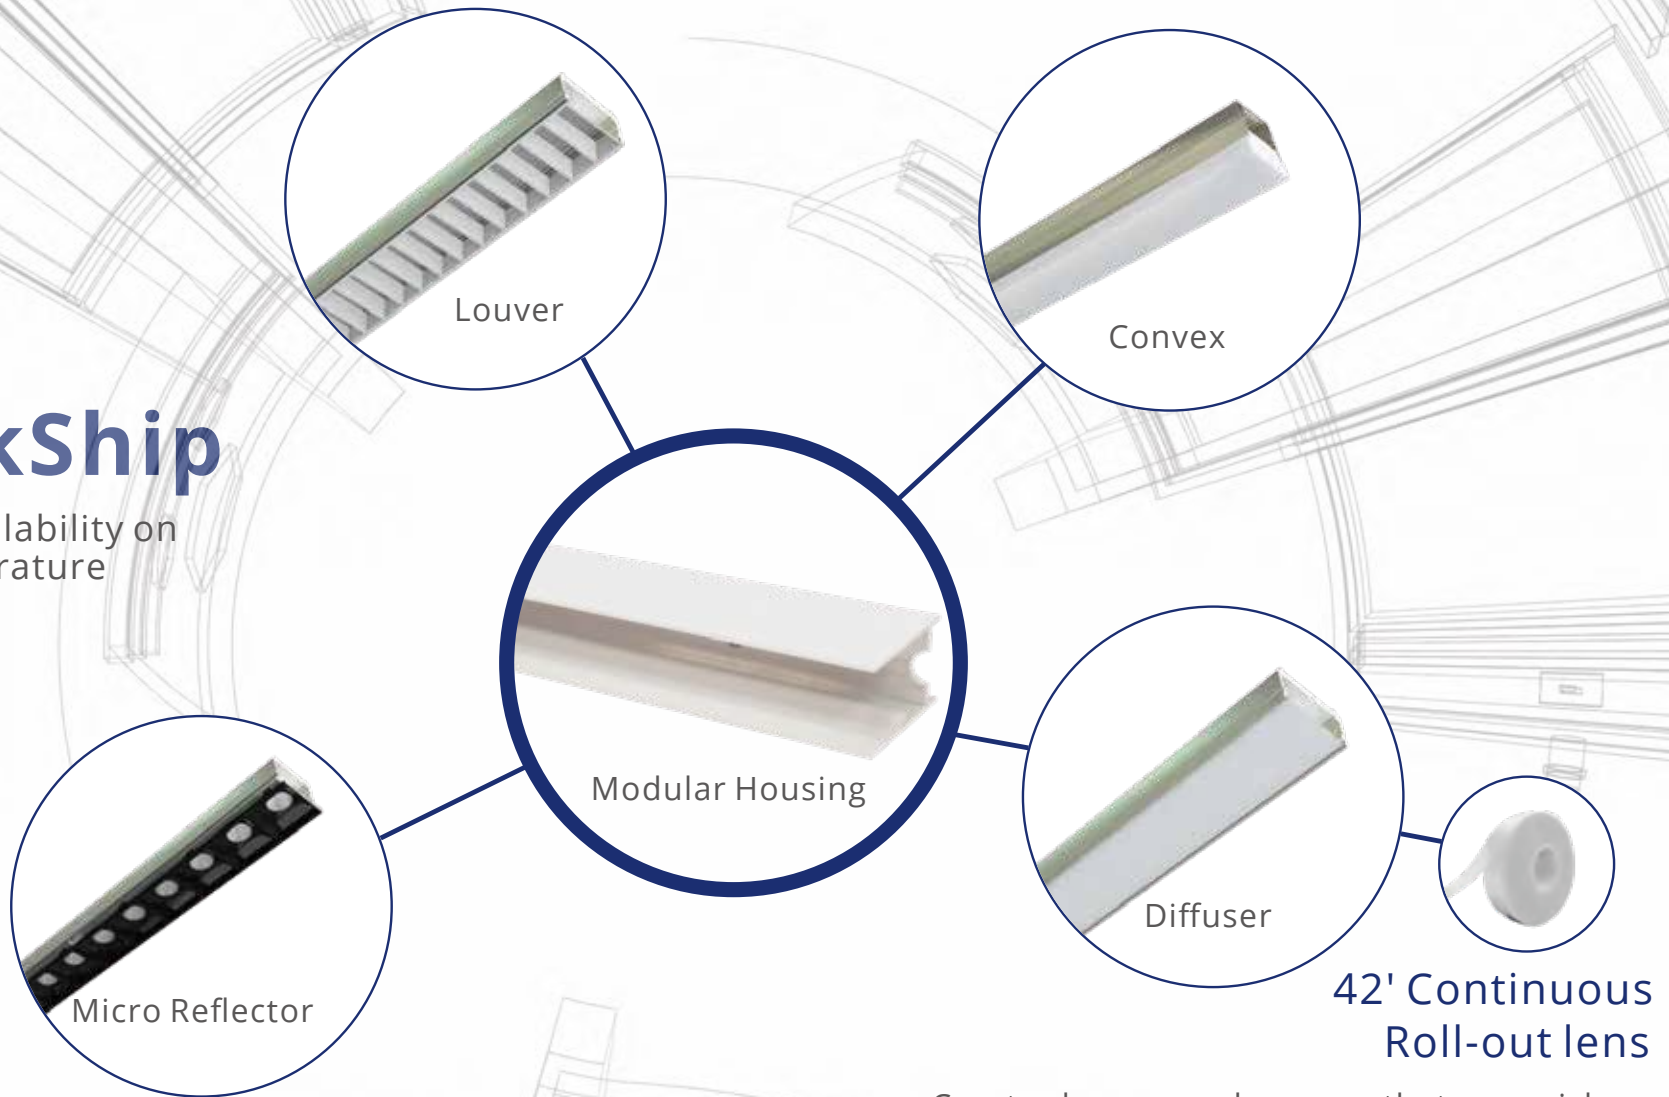

Create clean, seamless runs that are quicker to install with this quality press-in acrylic lens that will not crinkle or bow.



A modern lounge or office interior with large windows, exposed ceiling infrastructure, and contemporary furniture. The space features a mix of white, grey, and yellow seating, a bar area with shelves of bottles, and a view of a cityscape with a church spire. The ceiling has long, linear light fixtures and exposed ductwork.

# Simple And Clean Performance

Each Power Feed

- 120VAC: connections up to 40ft.
- 277VAC: connections up to 100ft.




## Mounting Options

Suspended



Surface



Wall Mounts



# Application Flexibility

## T-grid Or Dry Ceiling Compatible


### Canopy Style



1.6 in. round



4.5 in. round



4.5 in. round w/ EM  
Optional EM indicator



1.6 in. square



4.5 in. square



4.5 in. square w/ EM  
Optional EM indicator

### Dry Ceiling



Dry ceiling only  
Standard Ext. driver option  
Easy access to driver from below



Dry ceiling only  
Standard Ext. driver with EM option



### Drop Ceiling / T-Grid Ceiling



T - Grid Hanger

Ext. driver w/ hanger  
Additional building code compliant  
1.6 in. 4.5in. round/square available  
EM / Occ. sensor compatible



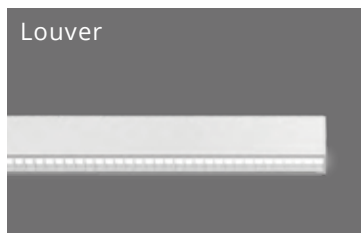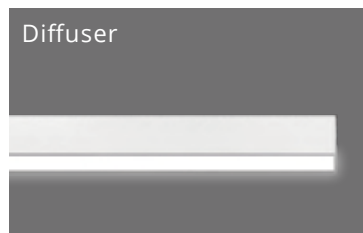

Model	ZE-X1-XXXXD	ZE-X1-XXXXL	ZE-X1-XXXXR	ZE-X1-XXXXC
1.3" Aperture	✓	✓	✓	✓
Lengths	2FT,4FT,8FT	2FT,4FT,8FT	2FT,4FT,8FT	2FT,4FT,8FT
Wattage	20W,40W,80W	20W,40W,80W	20W,40W,80W	20W,40W,80W
Efficacy (Base on up& down light distribution with 3500k)	105lm/w, 1050lm/ft	75 lm/w, 750lm/ft	120lm/w, 1200lm/ft	110 lm/w, 1100lm/ft
Beam Angle	Up150°,Down 100°	Up150°,Down 60°	Up150°,Down 48°	Up150°,Down 110°
100-277V Input (Int. Driver)	✓	✓	✓	✓
100-347V Input (Ext. Driver)	✓	✓	✓	✓
Wattage Selectable Option (100%,75%,50%)	✓	✓	✓	✓
1-10V Dimming	✓	✓	✓	✓
Custom Pattern	✓	✓	✓	✓
Pendant	✓	✓	✓	✓
Surface Mounted	✓ (2FT/4FT)	✓ (2FT/4FT)	✓ (2FT/4FT)	✓ (2FT/4FT)
Wall Mounted	✓ (2FT/4FT)	✓ (2FT/4FT)	✓ (2FT/4FT)	✓ (2FT/4FT)
Emergency Option	✓	✓	✓	✓
Sensor Option	✓	✓	✓	✓
UL/CUL	✓	✓	✓	✓

\*All efficacy is ±5% base on different CCT. Check the IES file to gain the accurate data .

\*Reflector Optics: When 100% downlight, 35W for 4' and 70W for 8'.